

# Technical data sheet

Series clip, light grey

Item number: 2254026



Also suitable for rails of 11 ÷ 12 mm slot width; polystyrene clip element, impact resistant, halogen-free, light grey RAL 7035; metal parts: electrogalvanised steel.



PS Polystyrene

| Master data                       |                         |  |
|-----------------------------------|-------------------------|--|
| Item number                       | 2254026                 |  |
| Type                              | 2050 5-25 LGR           |  |
| Description 1                     | Series clip             |  |
| Description 2                     | with cross-head screw   |  |
| Manufacturer                      | OBO                     |  |
| Dimension                         | 5-25mm                  |  |
| Colour                            | Light grey; RAL 7035    |  |
| Material                          | Polystyrene             |  |
| Smallest sales unit               | 100                     |  |
| Unit of quantity                  | Piece                   |  |
| Weight                            | 0.631 kg                |  |
| Weight unit                       | kg/100 pc.              |  |
| CO Footprint (GWP) Cradle-to-Gate | 0,0209 kg COe / 1 Piece |  |


# Technical data sheet

Series clip, light grey

Item number: 2254026



## Dimensions

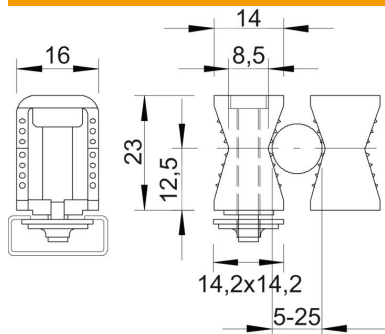

|              |         |
|--------------|---------|
| Dimension B  | 14 mm   |
| Dimension B1 | 7.5 mm  |
| Dimension H  | 24 mm   |
| Dimension H1 | 12.5 mm |

## Technical data

|                                                |                |
|------------------------------------------------|----------------|
| Distance to the wall                           | no             |
| Number of cables/pipes                         | 1              |
| Fastening type                                 | Rail fastening |
| for rail with slot width (with interval), max. | 12 mm          |
| for rail with slot width (with interval), min. | 11 mm          |
| Suitable in fire protection area               | no             |
| Halogen-free                                   | yes            |
| Plastic-covered                                | no             |
| Nominal diameter                               | 25 mm          |
| Impact-resistant                               | no             |
| Bolt                                           | M4 x 30        |
| Clamping range D, max.                         | 25 mm          |
| Clamping range D, min.                         | 5 mm           |
| UV-resistant                                   | no             |